


3000B Series Bulkhead 10-32 Thread

3200B Maxflex Cable - Part Number: 327XX FT or 327XXXX M
 3300B Maxflex Cable - Part Number: 337XX FT or 337XXXX M
 3400B Maxflex Cable - Part Number: 347XX FT or 347XXXX M

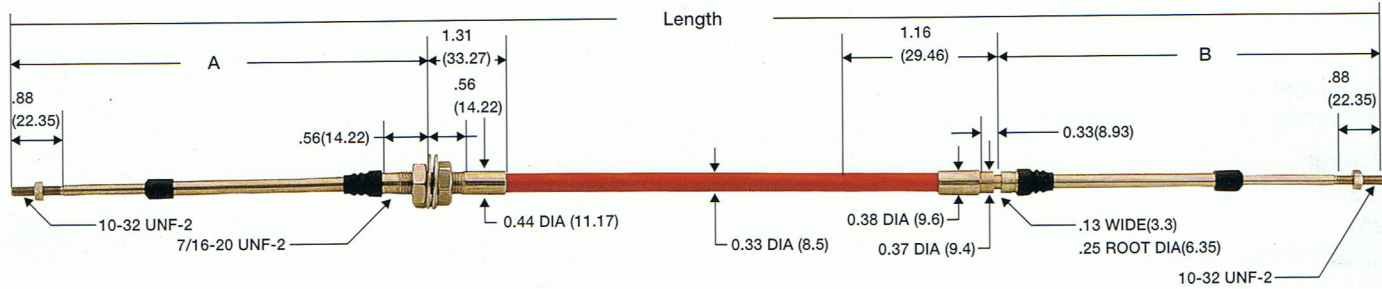

Technical Data

Travel	Clamp Type B	Input Load	Bulkhead Type A
	inches / mm	kgs / lbs	inches / mm
2"	5.19 / 131.82	22.7 / 50	5.87 / 149.09
3"	6.68 / 169.67	18.1 / 40	7.38 / 187.45
4"	8.19 / 208.82	13.6 / 30	8.87 / 225.59

- Solid stainless steel core wire: 0.075" (1.90M/M)
- With minimal amount of input force, this cable offers maximum efficiency and minimum friction by reducing 50% of contact areas between core-to-liner
- Limit of temperature range: -65 F to + 225 F
- Reduced backlash at 360°: 0.08" (2.0 M/M)
- Minimum bend radius: 6"
- HDPE outer casing for the ultimate durability

* Maxflex Control Cable for marine industry uses all stainless steel conduit fitting, end rod, swivel support tube, nuts, and core.