

4000 SERIES MAXFLEX CONTROL CABLES

Maximized cable efficiency by reducing 50% of the contact areas of core-to-liner when minimal input force is applied.

4000C Series Clamp 1/4-28 Thread



4200C Maxflex Cable - Part Number: 520XX FT or 520XXXX M
4300C Maxflex Cable - Part Number: 530XX FT or 530XXXX M
4400C Maxflex Cable - Part Number: 540XX FT or 540XXXX M

4000BC Series Bulkhead/Clamp 1/4-28 Thread




4200BC Maxflex Cable - Part Number: 525XX FT or 525XXXX M
4300BC Maxflex Cable - Part Number: 535XX FT or 535XXXX M
4400BC Maxflex Cable - Part Number: 545XX FT or 545XXXX M

4000B Series Bulkhead 1/4-28 Thread



4200B Maxflex Cable - Part Number: 527XX FT or 527XXXX M
4300B Maxflex Cable - Part Number: 537XX FT or 537XXXX M
4400B Maxflex Cable - Part Number: 547XX FT or 547XXXX M

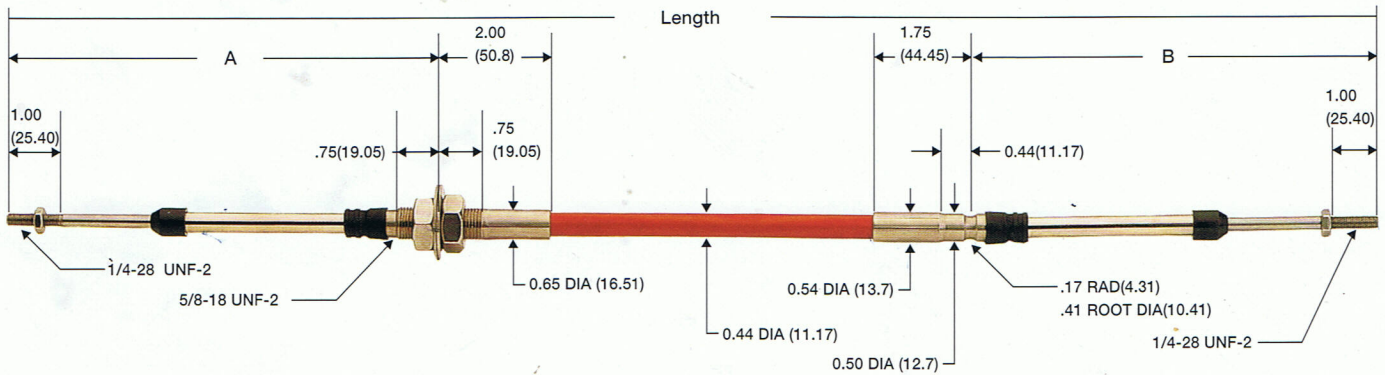

Technical Data

Travel	Clamp Type B	Input Load	Bulkhead Type A
	inches / mm		inches / mm
2"	5.50 / 139.7	68.0 / 150	6.13 / 155.70
3"	7.00 / 177.80	59.0 / 130	7.62 / 193.54
4"	8.50 / 215.90	50.0 / 110	9.13 / 231.90

- Core wire: 0.173" (4.40M/M)
- With minimal amount of input force, this cable offers maximum efficiency and minimum friction by reducing 50% of contact areas between core-to-liner
- Limit of temperature range: -65 F to + 225 F
- Reduced backlash at 360°: 0.08" (2.0 M/M)
- Minimum bend radius: 5"
- HDPE outer casing for the ultimate durability